



T3 . PROFESSIONAL BATTING TEE

MODEL: WTATT3000

ASSEMBLED VIEW

BASE VIEW

PARTS

FRAME

- A - Cone
- B - Shrink Tube
- C - Stem Top Tier - Composite
- D - O Ring
- E - Stem Middle Tier - Aluminum
- F - Stem Bottom Tier - Aluminum
- G - Base
- H - Stem Receptacle
- I - Expansion Plug
- J - T Screw

GENERAL CARE

- + To clean, wipe stem with mild detergent soap mixed with water, use clean towel to dry.
- + Do not add additional lubricant to tee stem pieces.
- + Do not over tighten T Screw, a snug fit is sufficient
- + When not in use, store in cool, dry environment.
- + If needed, a 10 pound (lbs) weight can be placed on the tee base to increase stabilization during use.

WARRANTY

Your T3 comes with a **1-year Limited Warranty**.

Under normal use and care ATEC guarantees, to the original owner, the T3 to be free from defects in materials and workmanship.


During this period ATEC will repair or replace with new or refurbished components, at ATEC's sole discretion, any component found to be defective without cost to the owner, provided the defective product is returned to the factory at the owners expense. Proof of purchase may be required by ATEC to approve certain warranty claims.

QUESTIONS?

ATEC Customer Service

(p) 1.800.755.5100

(e) askatec@atecsports.com

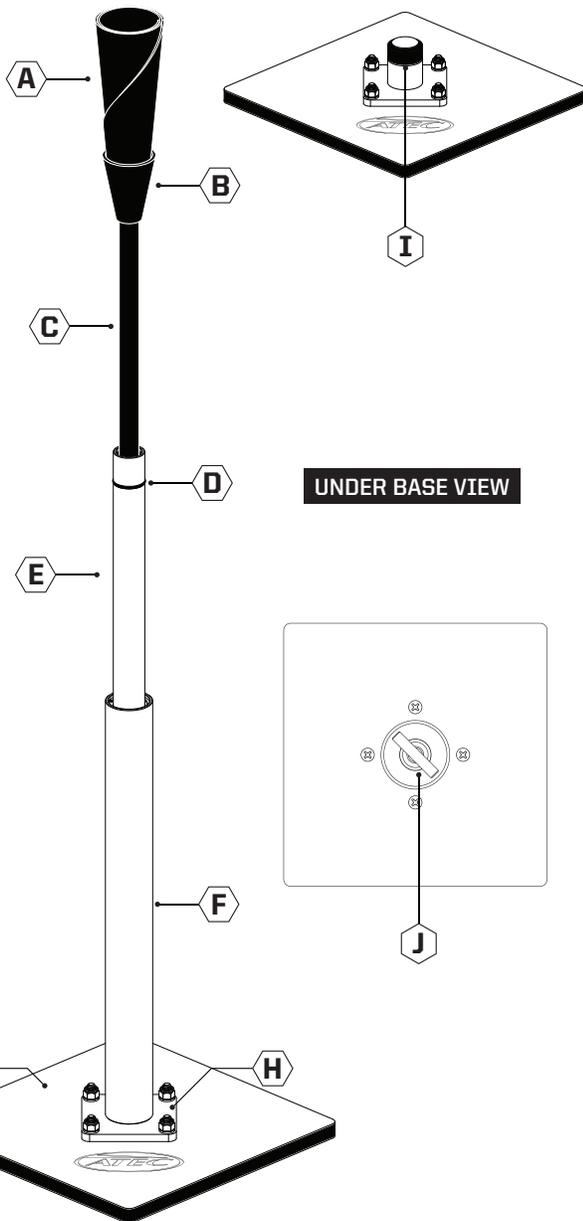

T3 . PROFESSIONAL BATTING TEE

QUICK START

SET UP





TAKE DOWN

STEP 1:

Place the **Stem (F)** completely over the **Expansion Plug (I)** located on the **Base (G)**.

STEP 2:

While holding the stem over the expansion plug, turn the **T-Screw (J)** clockwise to secure stem to base (Four clockwise rotations).

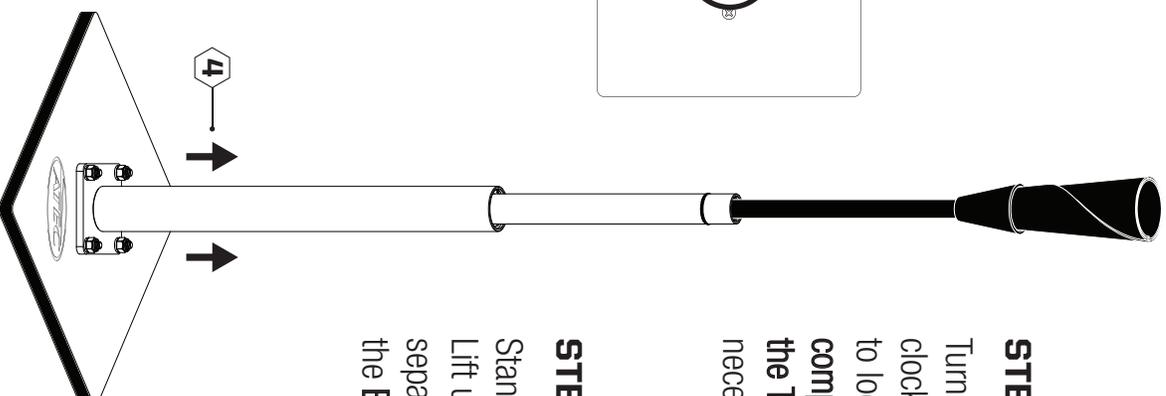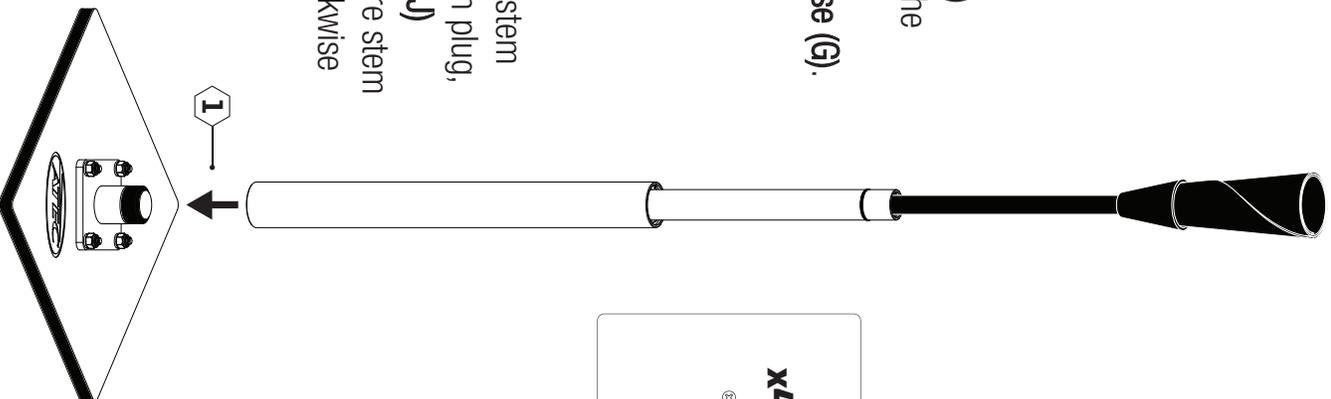

STEP 3:

Turn the **T-Screw** counter-clockwise four full rotations to loosen stem. **DO NOT completely remove/unscREW the T-Screw**, as this is not necessary.

STEP 4:

Stand on the **Base** and Lift up on the **Stem** to separate the **Stem** from the **Base**.